

BF Series

BLAST CHILLER & FREEZER



MODELS | BF37X, BF47X, BF67X

BF SERIES – BLAST CHILLER & FREEZER

Cool your food quickly for a safe storage and later consumption.

CABINET CONSTRUCTION

Heavy duty construction includes 304 stainless steel interior and exterior.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Bottom mounted condensing unit positioned for easy maintenance.

Chilling time: 70 °C to 3 °C in 90 mins. Freezing time: from 70 °C to -18 °C in 240 mins. (If you respect the quantity for each model)

STORAGE

BF37X: (5) GN1/1 or EN pan 40 mm deep and (3) GN1/1 or EN pan 65 mm deep.

BF47X: (10) GN1/1 or EN pan 40 mm deep and (7) GN1/1 or EN pan 65 mm deep.

BF67X: (13) GN1/1 or EN pan 40 mm deep and (9) GN1/1 or EN pan 65 mm deep.

MODEL FEATURES

Compatible with GN1/1 pan or 600*400 EN pan.

Electronic control system makes it easy to adjust temperature.

SPECIAL FEATURES

- AISI304 for both interior and exterior
- Around corner at bottom for easy cleaning
- Compatible for GN1/1 pan or 600*400 EN pan
- Ventilated cooling system
- Electronic control system with temperature display
- Self closing door
- Temperature sensor
- Automatic defrost
- R290



BF Series

BLAST CHILLER & FREEZER




MODELS | BF37X, BF47X, BF67X

TECHNICAL DATA

MODEL	MODE	TEMPERATURE	CHILLING CAPACITY (kg) FREEZING CAPACITY (kg)	CHILLING TIME (min) FREEZING TIME (min)	DIMENSIONS-WxDxH Inches	GN1/1 EN PAN (40mm) GN1/1 EN PAN (65mm)	VOLTAGE
BF37X	Chilling Freezing	70°C to 3°C 70°C to -18°C	20 15	90 240	31-1/2 x 32 x 36-11/16	5 3	220-240V 60 Hz
BF47X	Chilling Freezing	70°C to 3°C 70°C to -18°C	40 28	90 240	31-1/2 x 32 x 59-13/16	10 7	220-240V 60 Hz
BF67X	Chilling Freezing	70°C to 3°C 70°C to -18°C	60 38	90 240	31-1/2 x 32 x 69-7/16	13 9	220-240V 60 Hz

PLAN VIEW (BF37X)

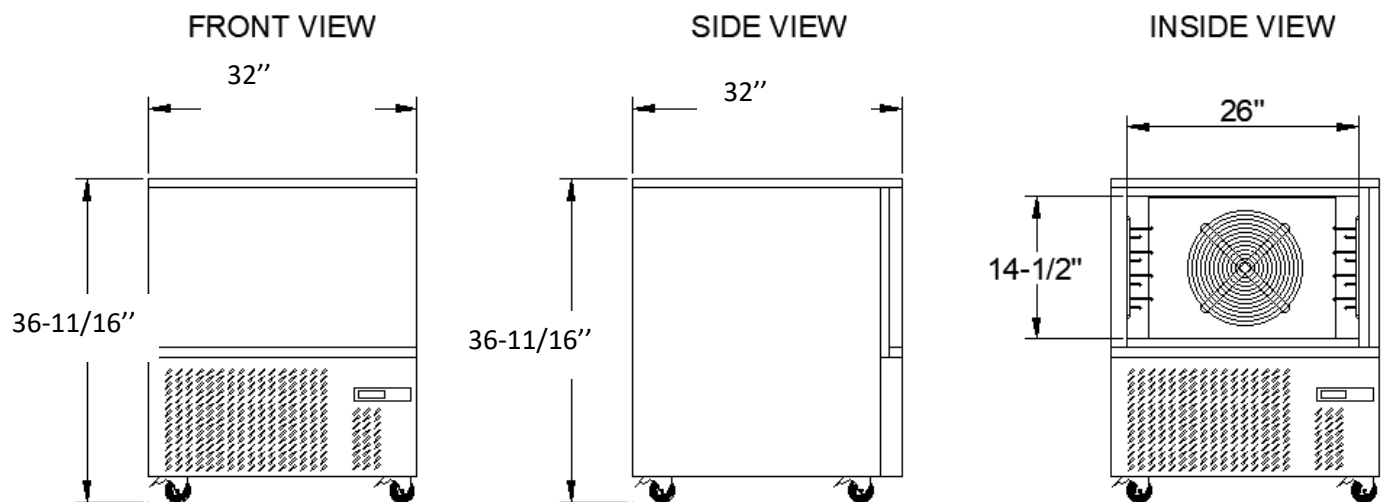

NOTE : These merchandisers are designed for use in stores when temperature and humidity do not exceed 24 °C and 55% RH. Designed for holding pre-chilled product only.

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

MAJFEV21