

# RICX-SS Series

## SWING GLASS DOOR REFRIGERATOR – 1 DOOR



MODEL | RICX-18SS

### RICX-SS SERIES – GLASS DOOR REFRIGERATOR

Keep ingredients within a safe temperature range in a sleek, durable, and easy-to-clean environment. Full glass doors are perfect to display your products.

#### CABINET CONSTRUCTION

Stainless steel interior and exterior, aluminium back. Option of bright with aluminium interior available.

The interior comes in an attractive aluminium liner with stainless steel floor.

Standard door features : Self-closing doors with 90 degree stay-open feature.

#### REFRIGERATION SYSTEM

Refrigeration system keeps food at safe temperature between 0.5°C to 5°C. Electronic system makes it easy to adjust temperature set point and defrost frequency.

#### MODEL FEATURES

3 gray epoxy-coated steel shelves included. Each accommodates up to 120 lb.

Preprogrammed digital controls feature auto-defrost function.

### SPECIAL FEATURES

- Stainless steel interior and exterior, aluminium back
- Option of bright white aluminium interior available
- Refrigeration system keeps food and safe temperatures between 0.5 °C to 5 °C
- Self-Closing doors with 90 degree stay-open feature
- Locks and keys included
- Shelves : Adjustable heavy-duty PVC coated shelves
- Electronic control system makes it easy to adjust temperature set point and defrost frequency
- Preinstalled heavy-duty casters with brakes
- Removable installation board makes it easy to access condenser coil for cleaning and service
- Option of different handles & control panels available



# RICX-SS Series

## SWING GLASS DOOR REFRIGERATOR – 1 DOOR





MODEL | RICX-18SS

### TECHNICAL DATA

MODEL	DOORS	TEMPERATURE	REFRIGERANT	DIMENSIONS-WxDxH Inches mm	CAPACITY L FT <sup>3</sup>	AMPS	VOLTAGE
RICX-18SS	1	0.5°C to 5 °C	R290	29 x 32-1/4 x 82-1/2 736 x 818 x 2095	660 23	2.6	115V 60 Hz

### PLAN VIEW

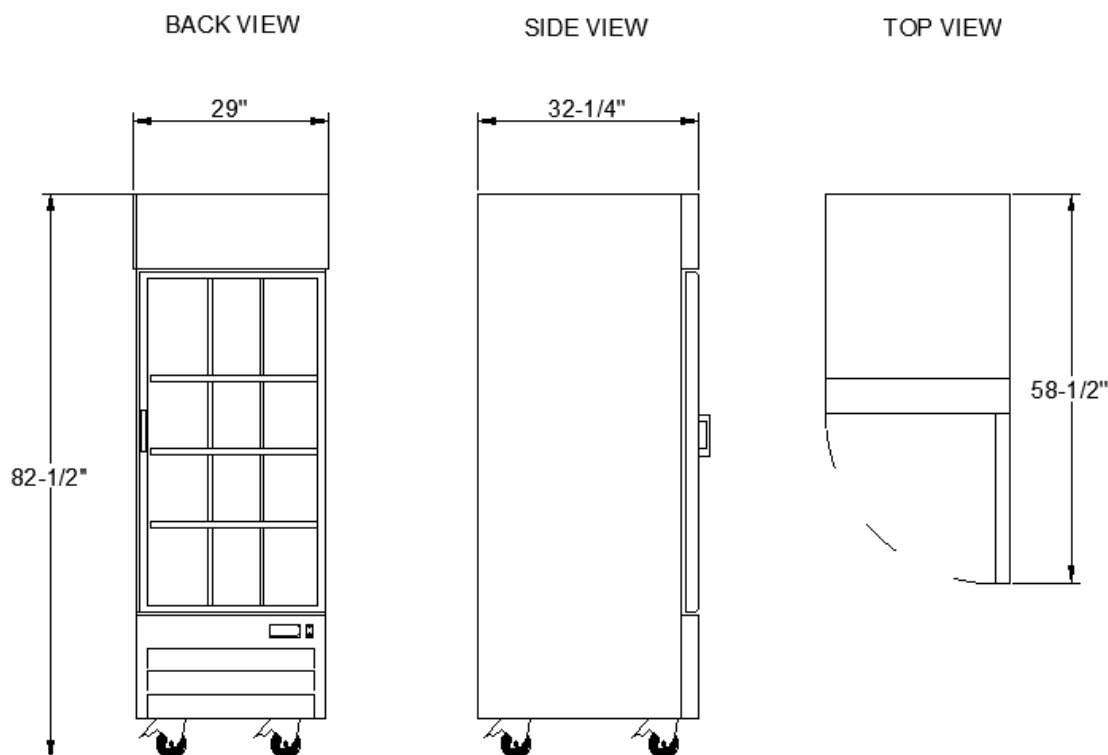

NEMA 5-15P

**NOTE:** These merchandisers are designed for use in stores when temperature and humidity do not exceed 24 °C and 55% RH. Designed for holding pre-chilled product only.

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.