

RIX Series

GLASS DOOR REFRIGERATOR – 2 DOORS



MODELS | RIX-50, RIX-50B

RIX SERIES – SLIDING GLASS DOOR REFRIGERATOR

Keep ingredients within a safe temperature range in a sleek, durable, and easy-to-clean environment. Full glass doors are perfect to display your products.

CABINET CONSTRUCTION

Coated steel exterior that comes in two options : Black or white finish.

The interior comes in an attractive aluminium liner with stainless steel floor.

2 doors feature inside and outside tempered glass panes. Self-closing, sliding doors won't for with use, ensuring clear product visibility at all time. Unlike swing doors, they don't require clearance outside the unit to open.

REFRIGERATION SYSTEM

Refrigeration system keeps frozen food at safe temperature between 0.5°C to 5°C. Electronic system makes it easy to adjust temperature set point and defrost frequency.


MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Convenient clean-out drain built into cabinet floor.

SPECIAL FEATURES

- Exterior : Coated steel. Black or white finish available
- Interior : Attractive aluminium liner with stainless steel floor
- Refrigeration system maintains temperatures between 0.5 °C to 5 °C
- Two sliding glass doors
- Shelves : adjustable heavy-duty PVC coated shelves
- LED lighting
- Electronic control system makes it easy to adjust temperature set point and defrost frequency
- Leveling feet or caster are available
- Removable installation board makes it easy to access condenser coil for cleaning and service



RIX Series

GLASS DOOR REFRIGERATOR – 2 DOORS





MODELS | RIX-50, RIX-50B

TECHNICAL DATA

MODEL	DOORS	TEMPERATURE	REFRIGERANT	DIMENSIONS-WxDxH Inches mm	CAPACITY L FT ³	AMPS	VOLTAGE
RIX-50	2	0.5°C to 5°C	R290	53-1/8 x 30 x 79-3/8* 1350 x 762 x 2015* *Add 4 inches with wheels	1270 45	4.3	115V 60 Hz

PLAN VIEW

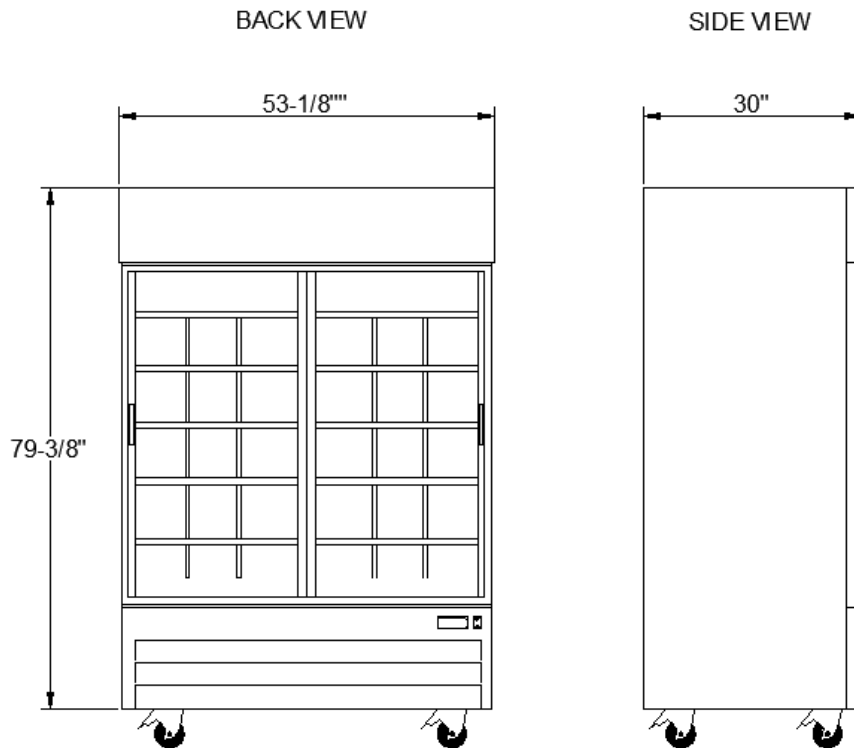

NEMA 5-15P

NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 24°C and 55% RH. Designed for holding pre-chilled product only.

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.